



STEWART R. BROWNE MANUFACTURING

Safety Stand Light

Stewart Browne hazardous location lights are UL listed for a variety of different hazardous locations. The lights are of course built and tested to meet the stringent UL requirements. The stands are also built to endure the harshest job site conditions. The tripod stands are made of heavy wall tube steel and have no plastic parts. The use of 400 Watt metal halide lights and 300 Watt flood lamps offer the flexibility to provide the right light and at the same time meet the NEPA requirements for hazardous environments.

Metal Halide lights feature the LH1000MH, an elliptical shape 1000 Watt metal halide fixture. The light heads are extremely strong, compact and the bulbs are rated to last 10,000 hours.

Hazardous Location Light Cart

Model XP2400-50P/WS

UL Listed Class 1, Div. 2
(2) 400 Watt Metal Halide Lights
Hazardous Location on a wheeled stand
50 ft 16.3 SO cable

Wheel Cart—44" x 24"

Heavy duty steel telescoping mat, which is raised and lowered by a self-braking wrench.

Adjustable from 5'6" to 12' high

Lumens—56,000

Weight—200 (lbs)



Model XP1530

UL Listed Class 1, Div. 1, Group C & D
Flood Light with Base
Hazardous Location

The XP1530 is standard with a 300 watt, 120 volt flood lamp. Ideal for use in outdoor locations or large tanks.

Available with tripod stand. (Model XP1530-50P/TRI)



XP1530 (light only) 17" H x 13" W 18 lb.
XP1530-50P (with 50-ft cord) 23 lb.



Model XP400-50P/TR

UL Listed Class 1, Div. 2
400 Watt Metal Halide Lights
Metal Halide Portable light on a tripod stand
50 ft 16.3 SO cable

Stand—Adjustable from 5'6" to 11' high

Lumens—14,000
Light is water tight

Weight—56 (lbs)



Model 1530-50P/TR

UL Listed Class 1, Div. 1
300 Watt Hazardous Location Floodlight
Portable light on tripod stand comes with 50 ft 16-3 SO cable

Stand—Adjustable from 5'6" to 11' high. Heavy wall steel construction

Weight—58 (lbs)
Lumens—3,000





STEWART R. BROWNE MANUFACTURING

Metal Halide Lights

Metal Halide lights feature the LH1000MH, an elliptical shape 1000 Watt metal halide fixture. The light heads are extremely strong, compact and the bulbs are rated to last 10,000 hours.

The Metal Halide lights are mounted in a heavy duty steel yoke, providing impact resistance when in use or when transporting to another location. All models are available with optional GFCI plug. All Metal Halide lights are 125V, but may be special ordered in other voltages. Metal Halide lights require a warm-up time of 4–5 minutes for full illumination. A cool-down time of 5–15 minutes is recommended after shutdown to re-light.

Model 5308

50 ft 16-3 SO cable

Stand—Adjustable from 5'6" to 11' high. Heavy wall steel construction.

Weight—55 (lbs)
Lumens—110,000



Model 5309

50 ft 16-3 SO cable


Wheel Cart—44" x 24"
Adjustable from 5'6" to 12' high. Heavy duty steel telescoping mat, which is raised and lowered by a self-braking wrench

Weight—102 (lbs)
Lumens—110,000



AW500—All steel plate and rod construction. Durable powder coated baked safety yellow finish. 'Jiffy hanger' included. Hang it, hook it, swivel it anywhere you're working. 500 watt quartz halogen fixture 110VAC with 6' of weatherproof cord and molded three pin plug.

B1—All lightweight aluminum plate and tubular construction. Powder coated safety yellow. Removable safety grid screen allows bulb replacement. Jiffy hanger included. 500 watt quartz halogen fixture 110VAC with 6' of weatherproof cord and molded three pin plug.

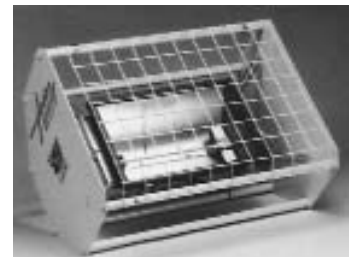

B15—'THE GREAT ONE.' 1500 watts (30,000 lumens) of light from standard 120 VAC power source. Unique to the industry, yet all standard Attiv patented features. Jiffy hanger included plus 6' of weather proof cord and molded three pin plug.

The Hi-Rise Power Panel



Provides 14 dual outlets—28 connections to service your HEPA units, lighting and tool requirements. Each circuit is GFI protected with 20 AMP breakers. Two 220V outlets are also provided. Customer installed #6 AWG/4 conductor single cord provides power from source. 16 gauge steel sheet and tubular construction. 10" easy roll wheels. Cable access at base of panel provides wet locations safety for connections.

Part No. PPHR-1



**Quadnector™ Polar/Solar®—
Four-way Power Block**

UL Listed—Meet OSHA Specifications. The versatility of 4-way power combined with the durability of Polar/Solar Cord. Receptacle and plug constructed with Coleman's all-weather T-Prene so it maintains total flexibility to -67°F. Weighs 1/3 less than ordinary cordage . . . resists oil, grease, solvents, abrasion, ozone and other cordage hazards.

300 Volt—Yellow

Part No.	Wire GA/Cond	Wire Type	Length in Ft.	125V Rating	Std Pkg	Pkg Wt
04412	12/3	SJEOW	6	15A	6	10
04417	12/3	SJEOW	25	15A	6	25
04418	12/3	SJEOW	50	15A	4	31
04419	12/3	SJEOW	100	15A	4	53



**Stripes™ Extension Cords
Featuring a Power Indicator Light**

The unique-looking and high-visibility Stripes™ extension cords from Coleman Cable were designed to promote job-site safety and easy owner identification.

Stripes Extension Cords also feature a power indicator light. The clear, waterproof, female-end lights up when electricity is in the cord. The light, generated from a gas filament, is extremely durable and will withstand even the most rugged of conditions. Plugs and connectors on all Stripes Extension Cords feature ground pins and blades reinforced with a heavy-duty molded insert.

Three Conductor Round Cord—300 Volt

Part No.	Wire GA/Cond	Wire Type	Length in Ft.	125V Rating	Std Pkg	Pkg Wt
02588*	12/3	SJTW	50	15A	6	40
02589*	12/3	SJTW	100	15A	4	52
025490041**	12/3	SJTW	100	15A	4	52

*Green/Yellow

**Red/White



**Multiple Outlet Cords—
Tri-Source™—Three Way Power Block**

UL Listed—Meet OSHA Specifications. Includes protective covers for unused outlets.

Yellow Polar/Solar®

Part No.	Wire GA/Cond	Wire Type	Length in Ft.	125V Rating	Std Pkg	Pkg Wt
03412	12/3	SEOW	25	15A	12	12
03418	12/3	SJEOW	50	15A	6	41

Yellow Polar/Solar Plus®—Featuring a Power Indicator Light

03482	12/3	SJEOW	2	15A	12	12
03489	12/3	SJEOW	100	15A	4	50

Round Orange Vinyl

04218	14/3	SJTW	50	15A	6	30
-------	------	------	----	-----	---	----



Vinyl Extension Cords


UL Listed—Meet OSHA requirement for Outdoor use. High visibility vinyl insulation resists oil, grease, moisture, abrasion and prolonged exposure to sunlight. Heavy duty molded-on plugs and connectors.

Three Conductor Round Orange Cord—300 Volt


Part No.	Wire GA/Cond	Wire Type	Length in Ft.	125V Rating	Std Pkg	Pkg Wt
02407	14/3	SJTW	25	15A	12	29
02408	14/3	SJTW	50	15A	6	27
02409	14/3	SJTW	100	13A	6	50
02508-0641**	12/3	SJTW	25	15A	6	40
02509-0641**	12/3	SJTW	100	15A	4	52
02608	10/3	SJTW	50	15A*	4	48
02609	10/3	SJTW	100	15A*	3	70

*Cap and Connector rated 15A


**red, white and blue



07775

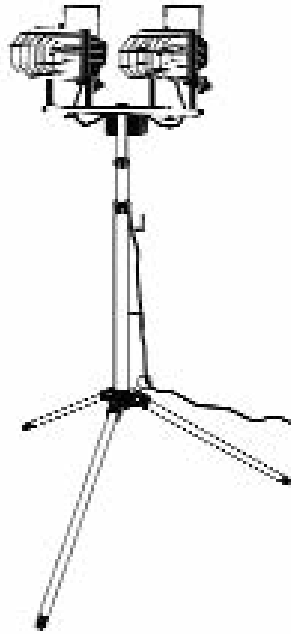

07776

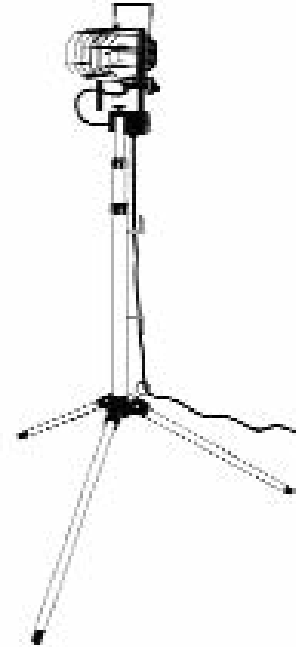

07777

Temporary Lighting Luma-Site™

When you need them, you will be glad to know that all Coleman Cable's Portable Luma-Site lights feature sturdy tri-pod footing*, pivoting heads that allow you to direct the 500 watts of "Instant-On" light in any direction, and a telescoping post* that extends up to 7 feet. When the job is done, you will be glad that they feature a convenient on/off power switch, are easily transported from site-to-site, and are completely collapsible for easy storage.

*Except for 07775

Features

- ▶ UL Listed
- ▶ 500 Watts of "Instant-On" light
- ▶ Wire guards protect lens and bulb
- ▶ 1/3 brighter than standard incandescent lighting
- ▶ 8-foot grounded cord with molded male plug
- ▶ Heavy duty powder coated casting
- ▶ Telescoping post—reaches height of 7 feet
- ▶ Pivoting head—allows you to direct the light beam
- ▶ Tri-pod base for sturdy footing—collapses for storage
- ▶ Collapsible—easy to transport from site-to-site

Portable Lighting Systems

UL Listed

Hand-Held Light Systems

Part No.	Description	Std. Pkg	Pkg Wt.
07775	500 Watt Bulb. Adjustable pivot handle with weatherproof On/Off Power Switch. No tri-pod and telescoping post	6	36

Dual Head Light System

Part No.	Description	Std. Pkg	Pkg Wt.
07776	Two 500 Watt Pivoting Heads, Separate On/Off Power Switches for Each Fixture. Tri-Pod included.	2	36

Single Head Light System

Part No.	Description	Std. Pkg	Pkg Wt.
07777	500 Watt Bulb. Ideal for Connecting Lights in Series. Tri-Pod included.	3	43

Accessories

Part No.	Description	Std. Pkg	Pkg Wt.
07880	Replacement 500 Watt Bulb	6	1
12WA	12 Ga. Hanging Wire	50 lb. bundle	



Coleman's T-Prene Insulated All-Weather, All-Condition Cord

UL Listed—Meets OSHA requirements for Outdoor use. Polar/Solar® Cord is the all-purpose outdoor cord that always stays light and flexible, even under the most extreme conditions. Polar/Solar® Cord will not crack, peel, flake, or bake out even in the most bitter arctic cold. Polar/Solar® maintains total flexibility to -70°C. Rugged T-Prene insulation shrugs off oil, grease, acids, solvents and offers outstanding resistance to abrasion, ozone and other on-the-job hazards. Polar/Solar® Cord weighs 1/3 less than ordinary cord.

Three Conductor 300 Volt—Yellow

Part No.	Wire GA/Cond	Wire Type	Length in Ft.	125V Rating	Std Pkg	Pkg Wt
01214	16/3	SJEOW-A	10	13A	24	15
01217	16/3	SJEOW-A	25	13A	18	32
01218	16/3	SJEOW-A	50	13A	12	32
01219	16/3	SJEOW-A	100	10A	6	32
01417	14/3	SJEOW-A	25	15A	12	21
01418	14/3	SJEOW-A	50	15A	6	26
01419	14/3	SJEOW-A	100	13A	6	50
01617	12/3	SJEOW-A	25	15A	12	32
01618	12/3	SJEOW-A	50	15A	6	30
01670	12/3	SJEOW-A	70	15A	6	42
01619	12/3	SJEOW-A	100	15A	4	50
01717	10/3	SJEOW-A	25	15A*	6	32
01718	10/3	SJEOW-A	50	15A*	4	45
01719	10/3	SJEOW-A	100	15A*	3	67

*Cap and Connector rated 15A

Also Available—Three Conductor 300 Volt—Black and Three Conductor 600 Volt—Yellow

CSA—Canadian Standards Association—Polar/Solar®

UL Listed


300 Volt—Yellow

Part No.	Wire GA/Cond	Wire Type	Length in Ft.	125V Rating	Std Pkg	Pkg Wt
01407	14/3	SJTW-A	25	15A	12	30
01408	14/3	SJTW-A	50	15A	6	32
01409	14/3	SJTW-A	100	13A	6	54
01607	12/3	SJTW-A	25	15A	12	45
01608	12/3	SJTW-A	50	15A	6	42
01609	12/3	SJTW-A	100	15A	4	56

Also Available—600 Volt—Yellow

Temporary Outdoor Lighting Systems

All feature lamp sockets in 10 foot increments



Economy Lite Streamer

Our most economical system! Features 14 gauge MTW (open conductors) and our easy-open, snap-on plastic guards. Accommodates bulbs up to 150 watts. Does not include caps or connectors.

Part No.	Wire GA/Cond	Length in Ft.	Type of Guard	125V Rating	Std Pkg	Pkg Wt
07308	14 ga. MTW	50	Plastic	15A	1	5

Replacement Caps and Connectors

UL Listed

Part No.	Description	Std. Pkg	Pkg Wt.
05984	All Vinyl, Large Dead Front, Male Cap, 3-Wire, Yellow Vinyl 15-Amp	20 Bulk	3
05985	All Vinyl, Large Dead Front, Female Connector, 3-Wire, Yellow Vinyl 15-Amp	20 Bulk	3


We carry
a wide variety
of Extension Cords
to meet your
power tool needs.



U.S. Wire & Cable Corporation

Temporary Power Boxes

U.S. Wire & Cable's™ Temporary Power Box is designed to offer power to virtually any large-scale outdoor event, such as: construction sites, carnivals and fairs, convention centers...etc. Temporary Power Box Cords are made from the highest quality STW wire. This jacketing is resistant to water, weather and abrasion. They have a heavy duty 125/250V 50 Amp plug and connector.

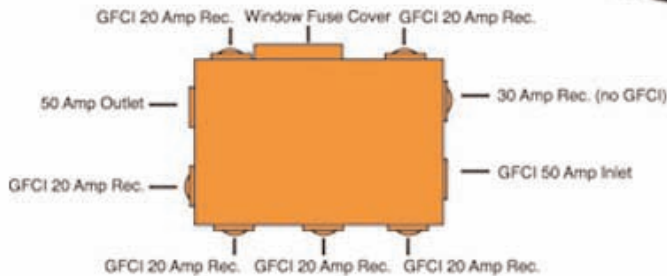

- Six (6) GFCI Protected 20 Amp Receptacles
- 30 Amp Receptacle for Special Needs
- Circuit Breaker Protection for All Outlets
- High Visibility Safety, Neon Orange Color

APPLICATIONS:
Construction Sites
Convention Centers
Stadiums
Party Rentals



Temporary Power Box & Cords

UL listed. Provides outdoor power, even in wet and damp locations.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
TPB-376	-	-	50A	1	30	42842-2
TPC-0050	6/3, 8/1	50	50A	1	40	42840-8
TPC-0100	6/3, 8/1	100	50A	1	80	42841-5



The 50 Amp inlets and outlets are recessed for additional safety. They also feature weatherproof covers.



All outlets are protected with weatherproof covers and are circuit breaker protected against overloads. The 20 Amp outlets have additional GFCI protection for added safety.



All outlets are circuit breaker protected against overloads. The circuit breaker panel has a clear weatherproof cover for easy viewing status of the breakers.



U.S. Wire & Cable Corporation

Specialty Lighting

Heavy Duty String-O-Lights - 600V

String-O-Lights is a flexible temporary lighting system available in five or ten socket configurations. Each bulb cage is plastic coated, non-metallic construction with a specially molded eyelet for easy hanging. STW wire, yellow cord color.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
45005	12/3	50 (5 socket)	15A	1	15	42820-0
45010	12/3	100 (10 socket)	15A	1	29	42822-4
45005MC	12/3	50 (5 socket)	15A	1	15	42827-9
45010MC	12/3	100 (10 socket)	15A	1	29	42828-6

String-O-Light Replacement Cages

Available in plastic and metal.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
45405RCP	-	-	-	20	5	42825-5
45405RCM	-	-	-	20	7	42826-2

Rough Service Incandescent Light Bulb

75 watt, indoor/outdoor light bulb for use with String-O-Lights.

ITEM NO.	WATTAGE	VOLT RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
45475	75	120	12	12	42823-1

Halogen Quartz Portable Light with Tripod

The 500 watt bulbs in these quartz lights are 33% brighter than incandescent bulbs. Each bulb cage has an instant On/Off switch, directional pivot base and 8 ft. grounded cord and plug. Telescoping tripod will extend up to 7 ft. Collapsible for easy storage.

ITEM NO.	NO. OF BULBS	TOTAL WATTAGE	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
46001N	1	500	2	16	42830-9
46003N	2	1000	2	19	42832-3

Halogen Quartz Portable Light


Quartz light with 500 watt bulb. Bulb cage has an instant On/Off switch and magnetic base for mounting to metal surfaces, 8 ft. grounded cord and plug.

ITEM NO.	NO. OF BULBS	TOTAL WATTAGE	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
46005N	1	500	6	6	42834-7

Halogen Light Bulb

500 watt bulb for use with Halogen Portable Lights.

ITEM NO.	WATTAGE	VOLT RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
46020B	500	-	20	24	42839-2

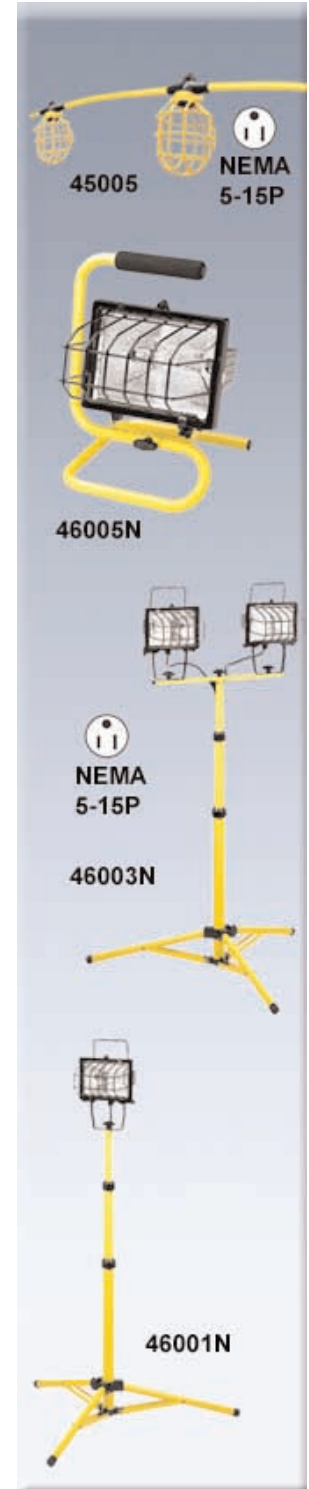



U.S. Wire & Cable Corporation

Cord Sets - Specialty

Three Conductor Grounded HI-VIZ Yellow & Black Cord - 300V

Cord color designed for greater visibility and added safety, constructed with low-temperature extra flexible Temp-Flex™ cord material.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
54075	14/3	75	15A	4	31	42710-4
54100	14/3	100	13A	2	21	42712-8
55050	12/3	50	15A	4	31	42532-2
55100	12/3	100	15A	2	31	42533-9

Three Conductor Grounded HI-VIZ Yellow & Black Triple Outlet Pow-R-Block - 300V

SJTW, Heavy-duty female plug allows for connection of three separate cords.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
42050	14/3	50	15A	4	21	42689-3

"American Pride" Three Conductor Grounded Red & Blue Cord - 300V

Promotional patriotic theme, easily visible cord color for safety.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
58050	12/3	50	15A*	4	31	42532-2

"Contractors Choice" Three Conductor Grounded Red & White Cord - 300V

Red & White striped outer jacket for visibility and added safety.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
58100	14/3	100	13A	2	21	42712-8

High Visibility Lighted-End Cords

High visibility lighted-end cords combine all the features of our standard vinyl outdoor extension cords with ultra-high-visibility fluorescent colors plus a lighted receptacle. When the cord is plugged in, the lamp in the female connector lights up to tell you the power is on.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
96050GRL	12/3	50	15A	4	31	70000-9
96100GRL	12/3	100	15A	2	31	70001-9
96050PKL	12/3	50	15A	4	31	70002-3
96100PKL	12/3	100	15A	2	31	70003-0
96050PPL	12/3	50	15A	4	31	70004-7
96100PPL	12/3	100	15A	2	31	70005-4

Same as above with opaque color plugs.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
96050GR	12/3	50	15A	4	31	70006-1
96100GR	12/3	100	15A	2	31	70007-8
96050PK	12/3	50	15A	4	31	70008-5
96100PK	12/3	100	15A	2	31	70009-2
96050PP	12/3	50	15A	4	31	70010-8
96100PP	12/3	100	15A	2	31	70011-5





U.S. Wire & Cable Corporation

Portable Ground Fault Circuit Interrupters

Portable Unit in Water & Shatter Resistant Case

Handy, compact unit with double outlets for indoor/outdoor use. Hi-impact plastic case with spring hinged cover, SJTW wire type. Unit has both reset and manual test buttons.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
50015	12/3	6	15A	6	6	42696-1
50017	12/3	6	15A	2	16	42697-8

*Item number 50017 is the same as 50015 but with 4 outlets instead of 2.

Waterproof In-Line GFCI to POW-R-Block™

Permanently molded triple outlet Pow-R-Block with in-line GFCI unit. Unit has both reset and manual test buttons. For indoor or outdoor use, SJTW wire type.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
50020	12/3	2	15A	6	6	42698-5

Attachable D.I.Y. GFCI Rainproof Plug


Do-it-yourself GFCI plug can be attached to any power tool or cord set, up to 12/3 wire, to make it meet OSHA specs for GFCI protection. Special sealant included to create rainproof connection.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
50022	-	-	15A	10	7	42720-3

Temp-Flex-35™ Triple Outlet Pow-R-Block™ with GFCI Plug

Temp-Flex low temperature SJTW, yellow cord with a permanently molded Pow-R-Block outlet at one end and a GFCI plug at the other. Plug has both reset and manual test buttons and is rainproof.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
50024	12/3	2	15A	12	12	42724-1
50026	12/3	50	15A	2	16	42726-5
50028	12/3	100	15A	2	30	42728-9

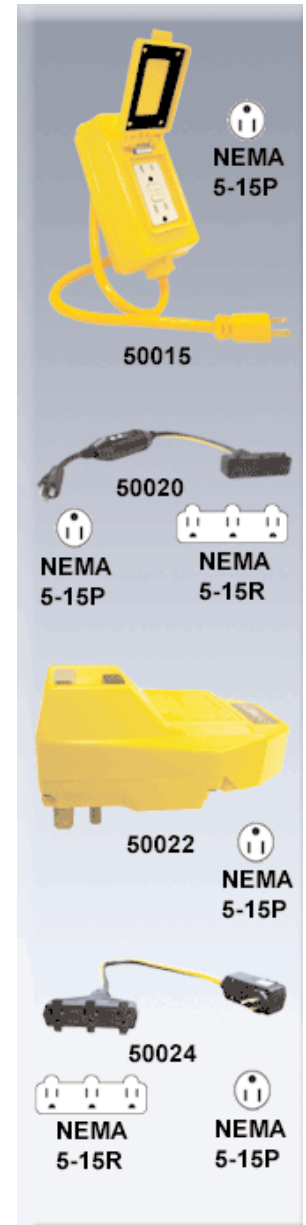



U.S. Wire & Cable Corporation

Cord Sets - Outdoor Round & Pow-R-Blocks

EXTREME - All-Weather TPE-Extension Cord Sets

The EXTREME All-Weather Extension Cord is constructed of 100% TPE (thermo-plastic elastometer) compound which guarantees maximum flexibility as well as abrasion and oil resistance.

Furthermore, the TPE compound provides a lightweight, tangle-free construction to the EXTREME cord, not commonly found on most standard PVC cords.

Tested in some of the harshest weather conditions in Alaska, the EXTREME All-Weather Extension Cord is designed for durability to last a lifetime!

Three Conductor Grounded EXTREME All-Weather Cord - 300V

TPE-Rubber (SJEOW) which provides maximum flexibility year-round. Includes power indicator light to show when power is on.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
98025	14/3	25	15A	6	14	42696-1
98050	14/3	50	15A	4	18	70013-9
98100	14/3	100	13A	2	18	70014-6
99025	12/3	25	15A	12	39	70017-7
99050	12/3	50	15A	4	26	70015-3
99100	12/3	100	15A	2	26	70016-0



Arctic/Tropic™ Oil Resistant TPE-Rubber Cord Sets:

Arctic/Tropic cords are made of oil resistant TPE-Rubber (SJEOW) which provides maximum flexibility year-round. Cords retain strength in temperatures as high as 212°F and flexibility in temperatures as low as -58°F. Superior resistance to sunlight, ozone, cracking, and chemicals, makes it great for use in garages and industrial applications where extra protection is needed. Yellow jacket color is a highly visible safety color for work sites.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
86050	16/3	50	13A	12	49	10004-5
86100	16/3	100	10A	6	49	10006-9
87025	14/3	25	15A	6	12	10008-3
87050	14/3	50	15A	4	16	10010-6
87100	14/3	100	13A	2	15	10012-0
88025	12/3	25	15A	12	43	10014-4
88050	12/3	50	15A	4	29	10016-8
88100	12/3	100	15A	2	29	10018-2
90050	10/3	50	15A*	2	20	10030-4
90100	10/3	100	15A*	2	36	10032-8

Three Conductor Grounded Arctic/Tropic Yellow Triple Outlet Pow-R-Block - 300V

Heavy duty female plug allows for connection of three separate cords.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
89002	12/3	2	15A*	12	12	10020-5
89025	12/3	25	15A*	12	43	10022-9
89050	12/3	50	15A*	4	29	10024-3
89100	12/3	100	15A*	2	29	10025-0

*Plugs rated 15A



U.S. Wire & Cable Corporation

Cord Sets - Outdoor Round & Pow-R-Blocks

Frigid-Flex™ TPE-Rubber Cord Sets

Frigid-Flex cords are made of TPE-Rubber (SJEW) compound for the most extreme weather conditions. Cord Retains strength in temperatures as high as 212°F and flexibility in temperatures as low as -58°F. Rugged blue color outer jacket.

Three Conductor Grounded EXTREME All-Weather Cord - 300V

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
80025	16/3	25	13A	12	18	42630-5
80050	16/3	50	13A	12	36	42632-9
80100	16/3	100	10A	6	36	42634-3
83025	14/3	25	15A	6	12	42636-7
83050	14/3	50	15A	4	16	42638-1
83100	14/3	100	15A	2	15	42640-4
85025	12/3	25	13A	12	46	42641-1
85050	12/3	50	15A	4	29	42642-8
85100	12/3	100	15A	2	29	42644-2



Three Conductor Grounded Frigid-Flex™ Blue Triple Outlet Pow-R-Block - 300V

SJEW, Heavy duty female plug allows for connection of three separate cords.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
81025	14/3	25	15A	6	16	43020-3
81050	14/3	50	15A	4	27	43022-7
82050	12/3	50	15A	4	29	43024-1
82100	12/3	100	15A	2	29	43026-5



Temp-Flex-35™ Vinyl Cord Sets

Temp-Flex-35 was developed to meet the demands of contractors for a super flexible vinyl cord set. Specially formulated SJTW vinyl outer jacket won't crack or break, even at temperatures as low as -35° F. Highly visible yellow color for safety.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
57025	14/3	25	15A	6	18	41000-7
57050	14/3	50	15A	4	23	41002-1
57100	14/3	100	15A	2	21	41004-5
59025	12/3	25	15A	12	46	41006-9
59050	12/3	50	15A	4	31	41008-3
59100	12/3	100	15A	2	31	41010-6
68050	10/3	50	15A*	2	26	42592-6
68100	10/3	100	15A*	2	48	42594-0

*Plugs rated 15A



U.S. Wire & Cable Corporation

Cord Sets - Outdoor Round & Pow-R-Blocks

POWER-ON Temp-Flex-35™ Vinyl Cord Sets

Same construction as Temp-Flex-35 cord set with the addition of power indicator light to show when power is on. Designed with convenience in mind, easily seen in day or night.

Three Conductor Grounded Temp-Flex-35™ Yellow Cord with "POWER-ON" Illuminated Plug - 300V

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
72025	16/3	25	13A	12	24	40000-8
72050	16/3	50	13A	12	43	40001-5
72100	16/3	100	10A	6	43	40002-5
73025	14/3	25	15A	6	17	40003-9
73050	14/3	50	15A	4	22	40004-6
73100	14/3	100	13A	2	20	40005-3
74025	12/3	25	15A	12	46	40006-0
74050	12/3	50	15A	4	31	40007-7
74100	12/3	100	15A	2	31	40008-4

Three Conductor Grounded Temp-Flex-35™ Yellow Triple Outlet Pow-R-Block with "POWER-ON" Illuminated Plug - 300V

Heavy duty female plug allows for connection of three separate cords.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
76025	12/3	25	15A	12	46	40013-8
76050	12/3	50	15A	4	31	40011-4
76100	12/3	100	15A	2	31	40012-1



Three Conductor Grounded Yellow Triple Outlet Pow-R-Block - 600V

Extra heavy-duty hard service cord, female plug allows for connection of three separate cords.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
66050	12/3	50	15A	4	31	66050-1
66100	12/3	100	15A	2	31	66052-5

Three Conductor Grounded Green Cord - 300V

Designed to blend easily with outdoor surroundings.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
50040	16/3	40	13A	12	49	68050-9
50080	16/3	80	10A	6	49	68055-4



U.S. Wire & Cable Corporation

Cord Sets - Outdoor Round & Pow-R-Blocks



Standard Hard Service Vinyl Cord Sets

Indoor/Outdoor SJTW vinyl cord sets constructed with double insulation and molded-on plugs. Orange, non-marring outer jacket. Packaging includes consumer information for easy selection of desired cord type.

Two Conductor Polarized Orange Cord - 300V

Polarized plug provides correct insertion into grounded receptacle.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
53010	16/3	10	13A	24	17	42515-5
53025	16/3	25	13A	12	19	42520-9
53050	16/3	50	13A	12	36	42525-4
53100	16/3	100	10A	6	36	43530-8

Three Conductor Grounded Orange Cord - 300V

SJTW, medium flexibility vinyl cord set.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
60010	16/3	10	13A	24	20	42535-3
60025	16/3	25	13A	12	25	42540-7
60050	16/3	50	13A	12	49	42545-2
60100	16/3	100	10A	6	49	42550-6
63025	14/3	25	15A	6	16	42555-1
63050	14/3	50	15A	4	21	42560-5
63100	14/3	100	13A	2	21	42565-0
65025	12/3	25	15A	12	46	42570-4
65050	12/3	50	15A	4	31	42575-9
65100	12/3	100	15A	2	31	42580-3

Three Conductor Grounded Orange Triple Outlet Pow-R-Block - 300V

SJTW, Heavy-duty female plug allows for connection of three separate cords.

ITEM NO.	GA/COND	LENGTH (FT)	125V RATING	PACK	WEIGHT (LBS)	UPC CODE 0-4482-
62010	14/3	10	15A	12	13	43000-5
62025	14/3	25	15A	6	16	43002-9
62050	14/3	50	15A	4	21	43004-3
62100	14/3	100	15A	2	21	43006-7
64002	12/3	2	15A	12	12	43008-1
64025	12/3	25	15A	12	46	43009-1
64050	12/3	50	15A	4	31	43010-4
64100	12/3	100	15A	2	31	43012-8