



General Carpentry

General Carpentry nails are the most popular family of nails. These nails are used in residential and commercial construction and other carpentry projects. This family includes: Common, Sinkers, Box, and Duplex nails.

Common Nail

Most popular nail and versatile style. For construction, carpentry and framing. Larger shank provides greater resistance to bending.



Bright Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
1-1/4"	3d	14	13/64"	543 3C
1-1/2"	4d	12-1/2	1/4"	294 4C
1-3/4"	5d	12-1/2	1/4"	254 5C
2"	6d	11-1/2	17/64"	167 6C
2-1/4"	7d	11-1/2	17/64"	150 7C
2-1/2"	8d	10-1/4	9/32"	101 8C
3"	10d	9	5/16"	66 10C
3-1/4"	12d	9	5/16"	61 12C
3-1/2"	16d	8	11/32"	47 16C
4"	20d	6	13/32"	29 20C
4-1/2"	30d	5	7/16"	22 30C
5"	40d	4	15/32"	17 40C
5-1/2"	50d	3	1/2"	13 50C
6"	60d	2	17/32"	10 60C



Bright Ring Shank

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
2"	6d	11-1/2	17/64"	167 6ATC
2-1/2"	8d	10-1/4	9/32"	101 8ATC
3"	10d	9	5/16"	66 10ATC
3-1/4"	12d	9	5/16"	61 12ATC
3-1/2"	16d	8	11/32"	47 16ATC
4"	20d	6	13/32"	29 20ATC
4-1/2"	30d	5	7/16"	22 30ATC
5"	40d	4	15/32"	17 40ATC
6"	60d	2	17/32"	10 60ATC

Use PrimeGuard Plus stainless steel for all treated wood.

Sinkers

For construction, carpentry and framing. Checkered countersunk head designed to sink flush with surface. Vinyl-coated smooth shank for easier nailing and firmer holding power.




Coated Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
1-1/8"	3d	15-1/2	11/64"	923 3CTDSKR
1-3/8"	4d	14	13/64"	527 4CTDSKR
1-5/8"	5d	13-1/2	7/32"	387 5CTDSKR
1-7/8"	6d	13	15/64"	293 6CTDSKR
2-1/8"	7d	12-1/2	1/4"	223 7CTDSKR
2-3/8"	8d	11-1/2	17/64"	153 8CTDSKR
2-7/8"	10d	11	9/32"	111 10CTDSKR
3-1/8"	12d	10	5/16"	81 12CTDSKR
3-1/4"	16d	9	11/32"	64 16CTDSKR
3-3/4"	20d	7	3/8"	40 20CTDSKR
4-1/4"	30d	6	13/32"	30 30CTDSKR
4-3/4"	40d	5	7/16"	23 40CTDSKR
5-3/4"	60d	3	1/2"	14 60CTDSKR

Duplex Nail

For temporary construction where nail removal is required, such as concrete forming and scaffolding. Smooth, uncoated shank and double head ease removal (second head remains exposed).

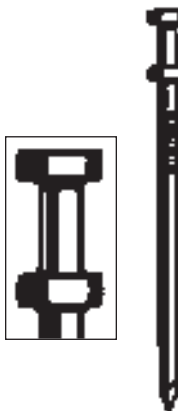

Bright Double-head Shank

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
2-7/64"	6d	11-1/2	3/16 / 17/64"	156 6DUP
2-5/8"	8d	10-1/4	15/64 / 9/32"	90 8DUP
2-3/16"	10d	9	1/4 / 5/16"	59 10DUP
2-7/64"	12d	9	1/4 / 5/16"	57 12DUP
3-1/2"	16d	8	9/32 / 11/32"	45 16DUP
4-1/64"	20d	6	5/16 / 3/8"	28 20DUP



Trim Carpentry Nails

Trim Carpentry nails family include finish nails and casing nails. These nails are used to build cabinets, bookshelves, furniture, and to attach moulding & trim. Their small heads can be countersunk so they become less visible.

Finishing Nails

For trim and fine finishing work. Small diameter and cupped head for countersinking beneath the wood surface for filling and smooth finished appearance.



Bright Smooth Shank

Size	Gauge	Head Size	Head Size	Approx. Count Per Lb.	SKU
1"	2d	18-1/2	0.066"	1,473	2F
1-1/4"	3d	15-1/2	0.099"	880	3F
1-1/2"	4d	15	0.1055"	630	4F
1-3/4"	5d	15	0.1055"	535	5F
2"	6d	13	0.135"	288	6F
2-1/4"	7d	13	0.135"	254	7F
2-1/2"	8d	12-1/2	0.142"	196	8F
3"	10d	11-1/2	0.155"	124	10F
3-1/4"	12d	11-1/2	0.155"	113	12F
3-1/2"	16d	11	0.162"	93	16F
4"	20d	10	0.177"	65	20F

Roofing Nails

There are a variety of nails designed for specific roofing materials. It is important that the correct nail is chosen to get proper holding power, weather protection, and to meet local building codes.



Roofing Nails

For applying roofing asphalt shingles, insulation board, and felt-to-wood substrates. Large head and heavier shank gauge provide greater holding power. Electrogalvanized nail also appropriate for use with vinyl siding.

Electrogalvanized Barbed Shank

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
1/2"	11	7/16"	528	12EGRFG
5/8"	11	7/16"	436	58EGRFG
3/4"	11	7/16"	348	34EGRFG
7/8"	11	7/16"	306	78EGRFG
1"	11	7/16"	272	1EGRFG
1-1/4"	11	7/16"	218	114EGRFG
1-1/2"	11	7/16"	186	112EGRFG
1-3/4"	11	7/16"	152	134EGRFG
2"	11	7/16"	144	2EGRFG
2-1/2"	11	7/16"	114	212EGRFG
3"	11	7/16"	92	3EGRFG
3-1/2"	11	7/16"	89	312EGRFG
4"	11	7/16"	78	4EGRFG



Casing Nails

For trim and fine finishing work. Heavier gauge suitable for door jams and window mouldings.



Bright Smooth Shank

Size	Gauge	Head Size	Head Size	Approx. Count Per Lb.	SKU
1-1/8"	3d	14-1/2	0.099"	654	3CAS
1-1/2"	4d	14	0.1205"	489	4CAS
2"	6d	12-1/2	0.142"	244	6CAS
2-1/2"	8d	11-1/2	0.155"	147	8CAS
3"	10d	10-1/2	0.17"	96	10CAS
3-1/4"	12d	10-1/2	0.17"	88	12CAS
3-1/2"	16d	10	0.177"	74	16CAS

Grip-Cap® Metal Cap Nail



For applying roofing asphalt singles, insulation board, and felt-to-wood substrates. Large head and heavier shank gauge provide greater holding power.

Bright Ring Shank with Round Metal Cap

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
3/4"	12	1"	117	34MRCAP
7/8"	12	1"	112	78MRCAP
1"	12	1"	107	1MRCAP
1-1/4"	12	1"	100	114MRCAP
1-1/2"	12	1"	84	112MRCAP
1-3/4"	12	1"	79	134MRCAP
2"	12	1"	74	2MRCAP
2-1/2"	11	1"	67	212MRCAP
3"	11	1"	60	3MRCAP
3-1/2"	9	1"	42	312MRCAP
4"	9	1"	37	4MRCAP
5"	8	1"	27	5MRCAP
6"	8	1"	24	6MRCAP






Needham Industrial Sales, Inc.

Contractors Equipment & Environmental Safety Supplies



Galvanized Roofing Nail with Neoprene Washers

For steel roofing and other flat roofing materials. Neoprene washer provides an effective waterproof seal.

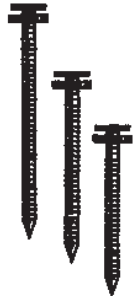

ElectroGalvanized Ring Shank With Neoprene Washer

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
1-1/2"	10	3/8"	118	112EGNEO
1-3/4"	10	3/8"	107	134EGNEO
2"	10	3/8"	96	2EGNEO
2-1/2"	10	3/8"	80	212EGNEO
3"	10	3/8"	66	3EGNEO
3-1/2"	9	3/8"	50	312EGNEO

Drywall Nails and Screws

Most drywall nails and screws are used to attach drywall and plasterboard to wood or metal studs. There are also specific drywall screws which are used for attaching wood trim to metal studs and also screws used to assemble the metal framework.

Drywall Nails

For attaching gypsum boards to wood studs. Long diamond point reduces cracking in drywall.



Cement Coated Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
1-1/4"	13	11/32"	325	114CTDDW
1-3/8"	13	11/32"	302	138CTDDW
1-1/2"	13	11/32"	281	112CTDDW
1-5/8"	13	11/32"	264	158CTDDW
1-3/4"	13	11/32"	243	134CTDDW
1-7/8"	13	11/32"	234	178CTDDW
2"	13	11/32"	206	2CTDDW
2-1/2"	13	11/32"	168	212CTDDW

Bright Ring Shank

Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
1-1/4"	12-1/2	19/64"	324	114ATDW
1-3/8"	12-1/2	19/64"	316	138ATDW
1-1/2"	12-1/2	19/64"	306	112ATDW
1-5/8"	12-1/2	19/64"	295	158ATDW
1-3/4"	12-1/2	19/64"	209	134ATDW
1-7/8"	12-1/2	19/64"	174	178ATDW
2"	12-1/2	19/64"	150	2ATDW
2-1/4"	12-1/2	19/64"	111	214ATDW
2-1/2"	12-1/2	19/64"	62	212ATDW



Specialty Nails

This category includes masonry nails, flooring nails, underlayment nails, pallet nails, truss nails, fence staples, polebarn nails, spikes, and gutter spikes.



Cut Masonry Nails

For attaching wood to cinder block, mortar joints, brick walls, and fresh concrete. Blunt point and tapered shank reduce splitting.

Tempered Hardened Steel Cut



Size	Gauge	Head Size	Approx. Count Per Lb.	SKU	
1-1/4"	3D	N/A	N/A	115	3CUTMAS
1-1/2"	4D	N/A	N/A	125	4CUTMAS
2"	6D	N/A	N/A	85	6CUTMAS
2-1/4"	7D	N/A	N/A	78	7CUTMAS
2-1/2"	8D	N/A	N/A	64	8CUTMAS
3"	10D	N/A	N/A	48	10CUTMAS
3-1/4"	12D	N/A	N/A	32	12CUTMAS
3-1/2"	16D	N/A	N/A	34	16CUTMAS
4"	20D	N/A	N/A	29	20CUTMAS

Masonry "Stub" Nails

Similar to masonry nails, but with larger head. Used for a variety of applications that call for a smooth masonry-style nail, including fastening pipe conduit, switch boxes, corner beads or wire mesh to masonry walls.

Tempered Hardened Steel Counter-sunk Head Smooth Shank




Size	Gauge	Head Size	Approx. Count Per Lb.	SKU
3/8"	9	11/32"	420	389GTSTB
1/2"	9	11/32"	335	129GTSTB
5/8"	9	11/32"	279	589GTSTB
3/4"	9	11/32"	248	349GTSTB
1"	9	11/32"	186	19GTSTB
2-1/2"	9	11/32"	78	2129GTSTB



E.L.HILTS
& COMPANY

Roofing Knives
Snap Knives and Blades
Rubber Grip Snap Knife



114-70 New Plastic 8 Point Snap Blade Knife Carded

- ▶ Plastic 8 point snap blade knife with one 8 point blade
- ▶ 10 Cards per shelf pak
- ▶ 6 Shelf paks per master

114-53 New 8 Point Snap Blades Carded

- ▶ 5 Blades per card pak
- ▶ 10 Cards per shelf pak
- ▶ 60 Shelf paks per master

Utility Knife Handles
Safety Grip Retractable Knife



All Metal Retractable USB-92 Utility Knife Handle




117-52B All metal retractable utility knife handles with 3 USB-92 Blades Bulk Pak 100 per master pak

Rofer Blades

114-30 New Roofer Blades

- ▶ 20 Wraps of 5s
- ▶ 50 Paks per master



Knucklesaver Utility Knife



Two Way Insulation/Scoring Knife



Spades & Accessories

What Makes The HILCO Fulcrum Attachment Better?

Most manufacturers of roofers' tear-off spades use light-gauge metal strips, bent in the center and single-welded to the spade head. Findings from our research and field work show light-weight fabrication is not durable enough for use by today's professional roofing contractors. Light-weight metal strips bend at the angled point.

HILCO tear-off spade fulcrums are constructed of 16-gauge metal, welded into place, then reinforced by 3/4" angle iron also welded into place.

Just try bending this double steel fulcrum!

HILCO #1 Fiberglass Handle Tear-Off Spade



Sturdy fiberglass handle delivers up to 10 times the strength of our hardwood handle models. Rugged, heavy-gauge, heat-treated steel spade head offer the additional durability needed by professional roofing contractors

7" x 12" spade head/59" overall length/weight 4-3/4 lbs.

HILCO #2 Fiberglass Handle Tear-Off Spade with Fulcrum and Notched or Plain Blade



Built with the same ruggedness as our standard #1 spade, but with the addition of the unique HILCO fulcrum design and our specially notched blade design (notched blade is optional).

59" overall length/weight 6-1/2 lbs.

Specify Model: **HILCO #2N Fiberglass Handle Tear-Off Spade with Fulcrum and Notched Blade (Not Shown)**

OR

HILCO #2P Fiberglass Handle Tear-Off Spade with Fulcrum and Plain Blade (Shown Above)

Also Available: Replacement 47" Fiberglass Spade Handles only

HILCO #3 Wood Handle Tear-Off Spade



Rugged hardwood handle mounted into a heavy-gauge 7" x 12" heat-treated spade head.

60" overall length/weight 4 lbs.

HILCO #4 Wood Handle Tear-Off Spade with Fulcrum and Notched or Plain Blade



Built with the same ruggedness as our standard #3 spade, but with the addition of the unique HILCO fulcrum design, and our specially notched blade design (notched blade is optional).

60" overall length/weight 4 lbs.

Specify Model: **HILCO #4N Wood Handle Tear-Off Spade with Fulcrum and Notched Blade (Shown Above)**

OR

HILCO #4P Wood Handle Tear-Off Spade with Fulcrum and Plain Blade (Not Shown)

Also Available: Replacement 48" Hardwood Spade Handles only

HILCO Roof Peeler on Wheels



Built like a miniature bulldozer. After the membrane is cut or sliced, simply ram the HILCO Roof Peeler under the insulation and pop up. Great for small jobs and on decks where a heavy power roof-remover cannot be utilized. This unit is built to endure those tough tear-off jobs. Durable 10" hardened steel blade is tapered to a sharp, efficient edge. 10" hardened blade is replaceable. 8" x 2" cast metal wheels with molded rubber strip.

6' overall length/weight 46 lbs.

(Can be shipped by U.P.S.)



E.L.HILTS & COMPANY

Jesco Mop Buckets



Heavy gage welded steel construction. Recessed insert bottom to dissipate heat. Optional side handle for easier pouring

Specifications			
Part No.	Product	Dimension	Weight
12BE	5 gal.	12" x 12"	9 lbs.
14BE	8 gal.	14" x 14"	13 lbs.
Color: Royal Blue			

EPDM Chip Brushes



3" & 4" Adhesive Paint Brushes

We searched high and low to find the best brush for EPDM roofing, and here they are! They are made from natural, 100% animal hair, securely bound to solid wood handles. This makes them resistant to the harsh chemical effects of EPDM adhesives. The short nap bristles make them ideal for rubber roofing.

- 3" Adhesive Paint Brushes, 1-3/4" Trim, Weighs 1.5 lbs./doz.
- 4" Adhesive Paint Brushes, 2" Trim, Weighs 4 lbs./doz.

Brooms



Hilco #904 Clean-Up Broom

Crimped orange polybase plastic bristles make this long lasting broom a favorite for all types of clean-up jobs. 16" width x 5-1/8" trim bristles. Weighs: 28 lbs. per dozen. Uses 1-1/8" Tapered Handles.

Heavy Duty Hardwood Broom Handles

Standard everyday broom handles simply do not hold up in the hands of most roofing mechanics. These are not your everyday broom handles. Made from rugged ash wood, then smooth sanded for a neat finish. Hefty 1-1/8" diameter x 5' length. Tapered End Handles required for above style brooms. Also available with Threaded Ends. Weights: 17 lbs. per dozen.



Hilco #400 Clean-Up Broom

A top quality Palmyra Fibre Bristle on sturdy hardwood block. Extra long bristles make for efficiency and longevity. 16" width x 7-1/8" trim bristles. Weighs: 37 lbs. per dozen. Uses 1-1/8" Tapered Handles.

Warehouse Corn Brooms



Don't take these brooms home to your wife. They are not flexible enough to use inside your kitchen, but they are perfect for roofing work. We have these brooms specially manufactured to meet the exacting requirements of professional roofing contractors. Heavy rattan stalks are securely encased around the handle, then crimped corn broom fibers are wrapped around and tightly stitched in. Lastly, a heavy wire band

envelopes the broom assembly. Strength and stiffness—durability and longevity are the key features of this specially designed broom. Weighs: 40 lbs. per dozen.

Spring-Steel Broom



High Carbon Spring-steel Head makes both cleaning up and gravel spreading a breeze. Long lasting 4" long steel tines offer not only the stiffness preferred by most mechanics, but can

be used for weeks after most fiber bristle brooms are long worn out. 16-1/2" x 4" tines mounted on a sturdy 1-1/8" x 5' hardwood handle. Spring steel broom heads weigh: 28 lbs. per dozen. Handles weigh: 17 lbs. per dozen.

EPDM Roller Covers and Roller Frames



EPDM Adhesive Roller Covers 4", 9" & 18" Sizes

After extensive field testing with contractors across the U.S. we know that these are the right Adhesive Roller Covers for the roofing industry's particular needs. These rollers will not "flop off" their cores after the first hours use, as so many other rollers will . . . because these rollers are manufactured to the demanding specifications required for professional roofing applications. Be sure to also order our sturdy frames shown below.

- 4" Covers, Weighs 2 lbs./doz.
- 9" Covers, Weighs 2.5 lbs./doz.
- 18" Cover, Weighs 4 lbs./doz.



Frames for Adhesive Rollers 4", 9" & 18" Sizes

Sturdy "birdcage" style frame assemblies for the above adhesive roller covers. Special female thread adaptor added to the end of the 4" and 9" frame handles so our 5 ft. fiberglass or wood handles can be added for extra length. The 18" frame is adjustable for 12"-18" roller covers, and comes with a 48" wood extension handle.

- 4" Frame, Weighs 1/3 lbs. each
- 9" Frame, Weighs 1/2 lbs. each
- 18" Frame & Hdl., Weighs 1-1/2 lbs. each

E.L.HILTS & COMPANY



Hilco FPS-40" Forward-Push Steel Feltlayer
Shown with **optional** oiler system.
Weight: 168 lbs.



Hilco FPA-40" Forward-Push Aluminum Feltlayer
Shown with **optional** oiler system.
Weight: 126 lbs.



Hilco PTA-40" Pull-Type Aluminum Feltlayer
Shown with **optional** oiler system.
Also shown with optional hinged aluminum lid assembly.
(Comes standard with side vat covers and baffle setup.)
Weight: 121 lbs.

Optional hinged lid assembly with strainer baskets available for all models.



Hilco Felt Layers

Hilco High-Production Feltlayers

For added versatility, Hilco has reengineered its line of feltlayers to accommodate new meter-wide rolls. These job site-proven feltlayers are built with skilled craftsmanship to deliver durability and ruggedness offered by no other units.

- ▶ **Lays new meter-wide rolls as well as standard 36" rolls.**
- ▶ **Easy, fail-safe conversion from 36" to 40"—and back again.**
- ▶ Comfortable dual flow-control levers operate from left or right side. Easily and infinitely adjustable, even while in motion.
- ▶ Unique Hilco valve system operates from both ends, avoiding possible damage. "Chrome-moly" steel inner valves precision-tapped for efficient flow rate.
- ▶ Single-point, center-balanced lifting eye for easier, safer hoisting.
- ▶ Adjustable ply-guide markers for accuracy.
- ▶ 30-gallon vat capacity.
- ▶ Vat covers with baffles reduced slosh, retain heat and allow an open area for bitumen filling. Optional hinged lid assembly with strainer baskets available (shown in photo inset).
- ▶ Optional oiler system with adjustable petcock valve available for all models. Use with Hilco ARA-201 Concentrated Asphalt Release Agent (1 gallon included with oiler system) for NO MORE MESSY ASPHALT BUILD-UP.

Hilco Forward-Push Feltlayers Steel (FPS-40") or Aluminum (FPA-40")

Forward-push equipment is safer and more economical, since no spotter is required.

- ▶ Four wheels for excellent balance, load distribution, ease of motion. Front wheels with keyed hubs are mounted on "live" axle for straight tracking automatically.
- ▶ 4.80 x 4.00 rear wheels on 1" axles (also available with 4.80 x 4.00 x 8 Carefree tires), 4.10 x 3.50 x 6 front wheels on 3/4" keyed live axle.

Hilco PTA-40" Pull Type Aluminum Feltlayer

Requires second person as spotter.

- ▶ Extra heavy-duty square tubing frame welded onto vat body.
- ▶ 4.80 x 4.00 wheels on 1" axles (also available with 4.80 x 4.00 x 8 Carefree tires), 4.10 x 3.50 x 6 adjustable sliding rear wheel (easy to remove and clean).



E.L.HILTS & COMPANY

Hilco Green Giant Wheelbarrows



**Another Hilco Original—
Now The Original Two
Wheel Wheelbarrow Is
Even Better!**

Rugged, solid one piece frame construction. Front roll plate makes dumping easy and protects roof. Available with three different wheel options, 4.80 x 4.00 x 8 wheels on 1" axles.

Capacity: 6 cu. ft. (heaped)

Standard Weight: 88 lbs.

Standard Wheels: Two 4.80 x 4.00 x 8 Wheels on 1" Axle

Optional Wheels: 4.80 x 4.00 x 8 Carefree Wheels or
18 x 8.50 Balloon-Type Wheels

Hilco Big Daddy Mop Cart



**The Original Big Wheel
Mop Cart And Still The
Best**

Great balance, a low-loading height, splash-proof, wrap-around fenders and the unique center-bent rear handle holder are just a few of the features that help to make the Hilco Big Daddy one of the most popular mop carts on the market. Constructed with reinforced side braces. Anti-tip skids on front and rear. Two 4.80 x 4.00 x 8 wheels on 1" axle. Available w/Carefree Wheels.

Weight: 75 lbs.

Capacity: 30 gallons

Hilco Mustang Material Hauler



Super sturdy steel construction. Ideal for hauling tear-off material, ballast stone, insulation boards and roll goods. Designed and balanced to dump directly into trash-collection hopper system. Extra long handles provide additional support.

Bed Measurements: 32" I.D. bottom x 40" O.D. top (Width)
42" Length x 12" Depth

Capacity: 900 lbs.

Standard Wheels: Two 4.80 x 4.00 x 8 Wheels on 1" Axle

Optional Wheels: 4.80 x 4.00 x 8 Carefree Wheels or
18 x 8.50 Balloon-Type Wheels

Standard Weight: 133 lbs.

Hilco Insulation Hand Truck with Training Wheel Kit



**Optional Training Wheel
Kit for increased stability,
maneuverability and pro-
ductivity. Full adjustable
training wheel set
includes two 4.80 x 4.00
wheels on 1" axle.**

This unit is ideal for moving foam-type insulation over a variety of surfaces. Works great for transporting single-ply rolls, felt and lighter pallets of materials. An extra-wide wheel base with two 18.8.50 balloon-type wheels on 1" axle reduces damaging compaction and gives excellent stability.

Capacity: 800 lbs.

Insulation Hand Truck only: Weighs 105 lbs.

IHT Training Wheel Kit only: Weighs 40 lbs.



Needham Industrial Sales, Inc.

Contractors Equipment & Environmental Safety Supplies



E.L.HILTS & COMPANY

Big Boss Utility Trailer



Large 38" x 72" Bed

The most popular and versatile material handling carrier in the roofing industry. This heavy duty utility trailer is equipped with four large balloon-type 18 x 8.50 x 8 wheels on 1" axles and features a

drop-handle brake system. Makes moving roll goods, insulation, tear-off debris so much easier, and the extra-large bed size with large wheels better distributes load weight for less deck and membrane damage. Two or three trailers can be hooked together. We know you will find this to be the sturdiest and best-built trailer of its type. Big Boss doubles as a hot lugger hauler by mounting channel irons and pins (uprights) and 55 gallon insulated drum on channel rack frame.

Capacity: 2000 lbs.

Weight: 236 lbs.

Little Boss Utility Trailer



Here it is! A smaller version of our original larger four-wheel utility trailer. Still rugged and sturdy, featuring a drop handle brake. So economical you can afford several on every job.

Bed Size: 30" x 60"

Overall Width @ maximum: 42"

Capacity: 1500 lbs.

Trailer Weight: 170 lbs.

Standard Wheels: Two 4.80 x 4.00 x 8 Wheels on 1" Axle

Optional Wheels: 4.80 x 4.00 x 8 Carefree Wheels or 18 x 8.50 Balloon-Type Wheels

Big Boss Dump Tray & Trailer Kit



Hilco's Unique Pull-Down Dump Handle design, coupled with our well balanced tray assembly make these units easy and safe for just one man to dump. Ideal for use on low height build-

ings. Mounted on our large 38" x 72" Hilco Big Boss Utility Trailer. Even the huge 1000 lb. payload can still be moved by just one man.

Tray Size: 40 cu. ft. (75" wide x 18-1/2" high x 50" deep)

Tray Capacity: 1000 lbs.

Tray only Weight: 305 lbs.

Trailer & Tray Weight: 540 lbs.

Little Boss Dump Tray & Trailer Kit



Designed to be used in conjunction with trash chute systems. Mounted on our 30" x 60" Hilco Little Boss Trailer. 800 lb. payload can be easily maneuvered by one man.

Tray Size: 16-2/3 cu. ft.—
(32-3/4" wide x 12" high x 73-1/4" long)

Tray Capacity: 800 lbs.

Tray only Weight: 200 lbs.

Trailer & Tray Weight: 370 lbs.

Boston, Massachusetts
Hollywood, Florida

(800) 783-9400
Fax: (508) 626-0102



RED RIPPER®

Red Ripper® D Handle



SKU: REDRIP
UPC: 6 27308 97110 0
PKG: 6
WEIGHT: 30 lb.
VOL. cu. ft.: 2.9

Redscraper Long Handle



SKU: REDSC-LH
UPC: 6 27308 97150 0
PKG: 3
WEIGHT: 20 lb.
VOL. cu. ft.: 1.9

Aviation Snips




Description	Part No.
Yellow	36-314
Professional Crv	36-317
Prof. Crv. Red	36-318
Prof. Srv. Green	36-319

Red Ripper® Long Handle



SKU: REDRIP-LR
UPC: 6 27308 97120 9
PKG: 6
WEIGHT: 30 lb.
VOL. cu. ft.: 3.0

V-Groove Scraper

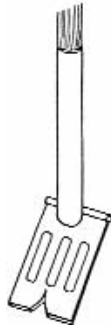

SKU: REDSCV-LH
UPC: 6 27308 97271 8
PKG: 3
WEIGHT: 20 lb.
VOL. cu. ft.: 1.9

Aviation Snips—Offset



Description	Part No.
Prof. Crv. Red	36-327
Prof. Crv. Green	36-329

Professional Scissor



Description	Part No.
10" Stainless Steel	36-466
12" Stainless Steel	36-468

Shingle Hatchets




Description	Part No.
Hickory Handle 16 oz.	04-442

Red Ripper® Short Handle



SKU: REDRIP-SR
UPC: 6 27308 97130 8
PKG: 3
WEIGHT: 14 lb.
VOL. cu. ft.: 1.7

RED PRY BROOM



SKU: REDPB-18
UPC: 6 27308 97274 8
PKG: 3
WEIGHT: 20 lb.
VOL. cu. ft.: 10.0


Description	Part No.
Steel Handle 16 oz.	04-452

Hickory Handle Hammers



Description	Part No.
16 oz. Claw	04-142
20 oz. Claw	04-143
16 oz. Ripping	04-241
20 oz. Ripping	04-242

Handy Little Ripper®



SKU: REDRIP-HL
UPC: 6 27038 97140 7
PKG: 6
WEIGHT: 28 lb.
VOL. cu. ft.: .58

Tin Snips



Size No.	Part
7"	36-352
10"	36-353
12"	36-354

Magnetic Broom



Description	Part No.
48" Folding Handle	73-222



Needham Industrial Sales, Inc.

Contractors Equipment & Environmental Safety Supplies



PALLET COVERS


Rubberized Canvas Weather Shield

Standard sizes for 4' x 4' and 4' x 8' pallets

Custom sizes available

Various colors available

- ▶ Heavy Duty Weather Resistant Canvas Construction
- ▶ Mildew and Mold Resistant Canvas
- ▶ Strong Tie down Eyelets
- ▶ Optional Theft Deterrent:
- ▶ "Property of Your Company Name" Markings

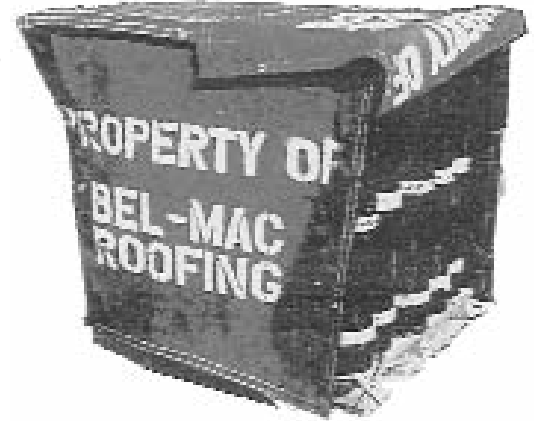

Pallet Covers Advertising Your Company



Standard sizes 4' x 4' and 4' x 8'

Custom sizes and colors available

Small minimum for custom orders

Most full pallet orders shipped free freight east of Mississippi

Disposable 4' x 8' Pallet Covers

Clear or White Opaque

Stock unprinted white opaque pallet covers in 4' and 8' sizes

All thickness and sizes available in full pallet quantities

